



Ground Level

Fig. 3

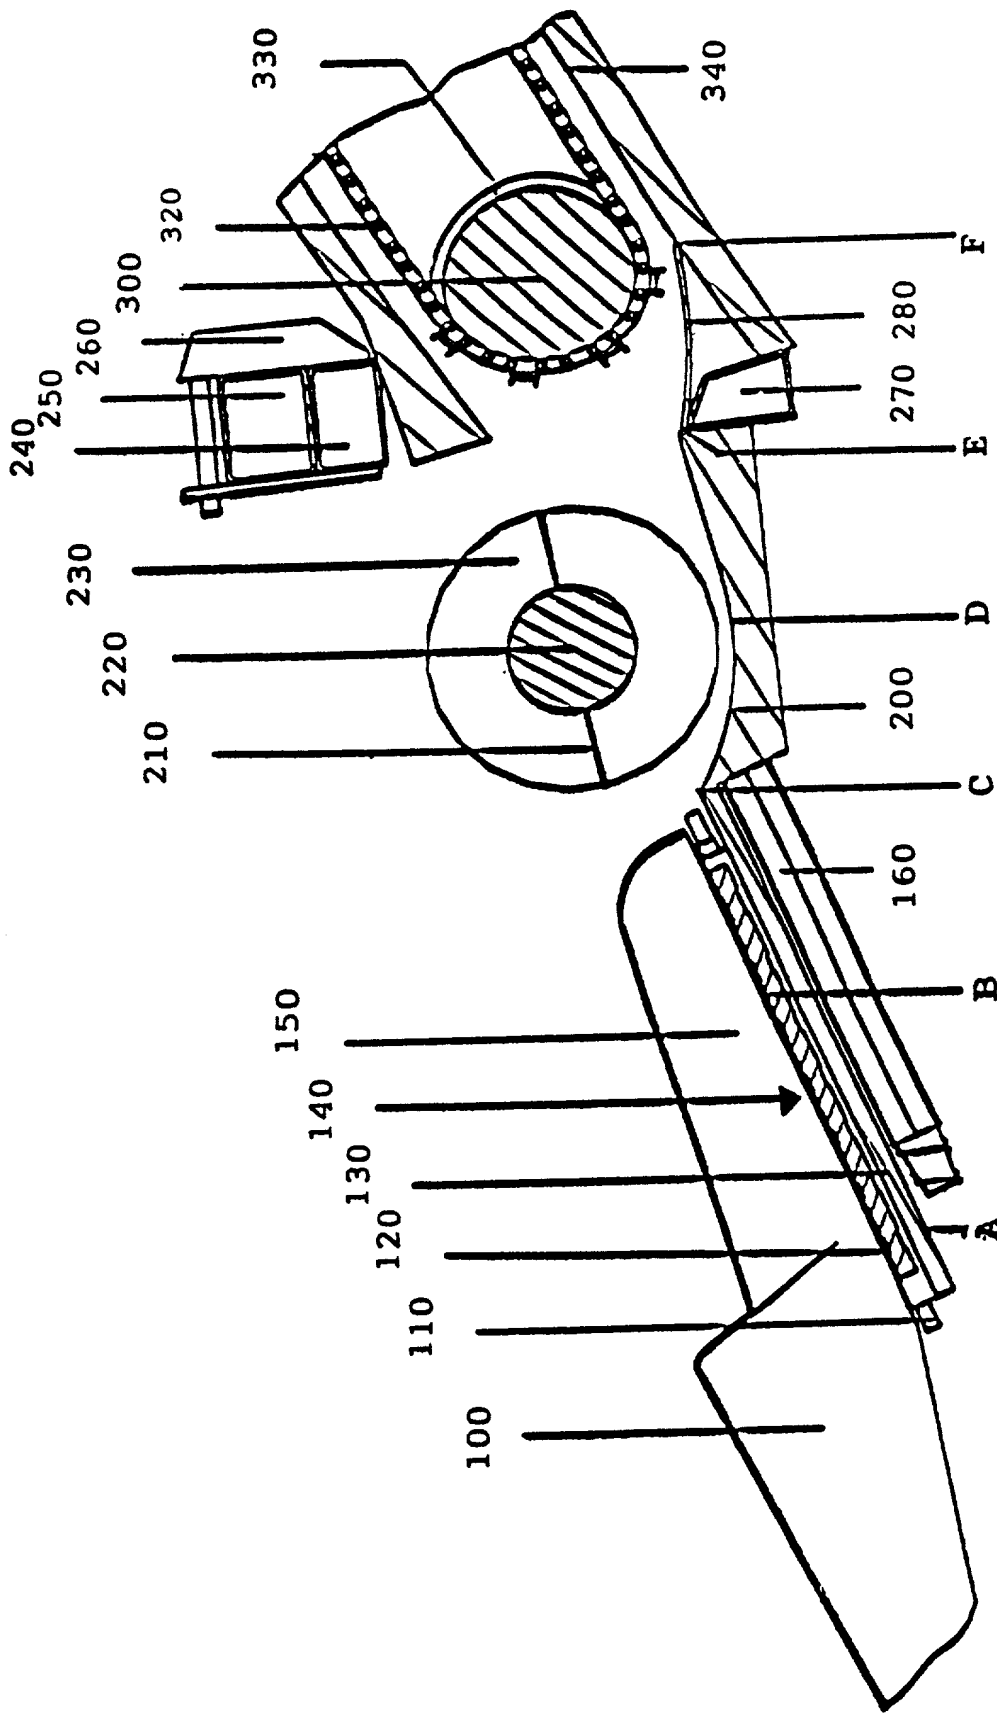

Ground Level

Fig. 4

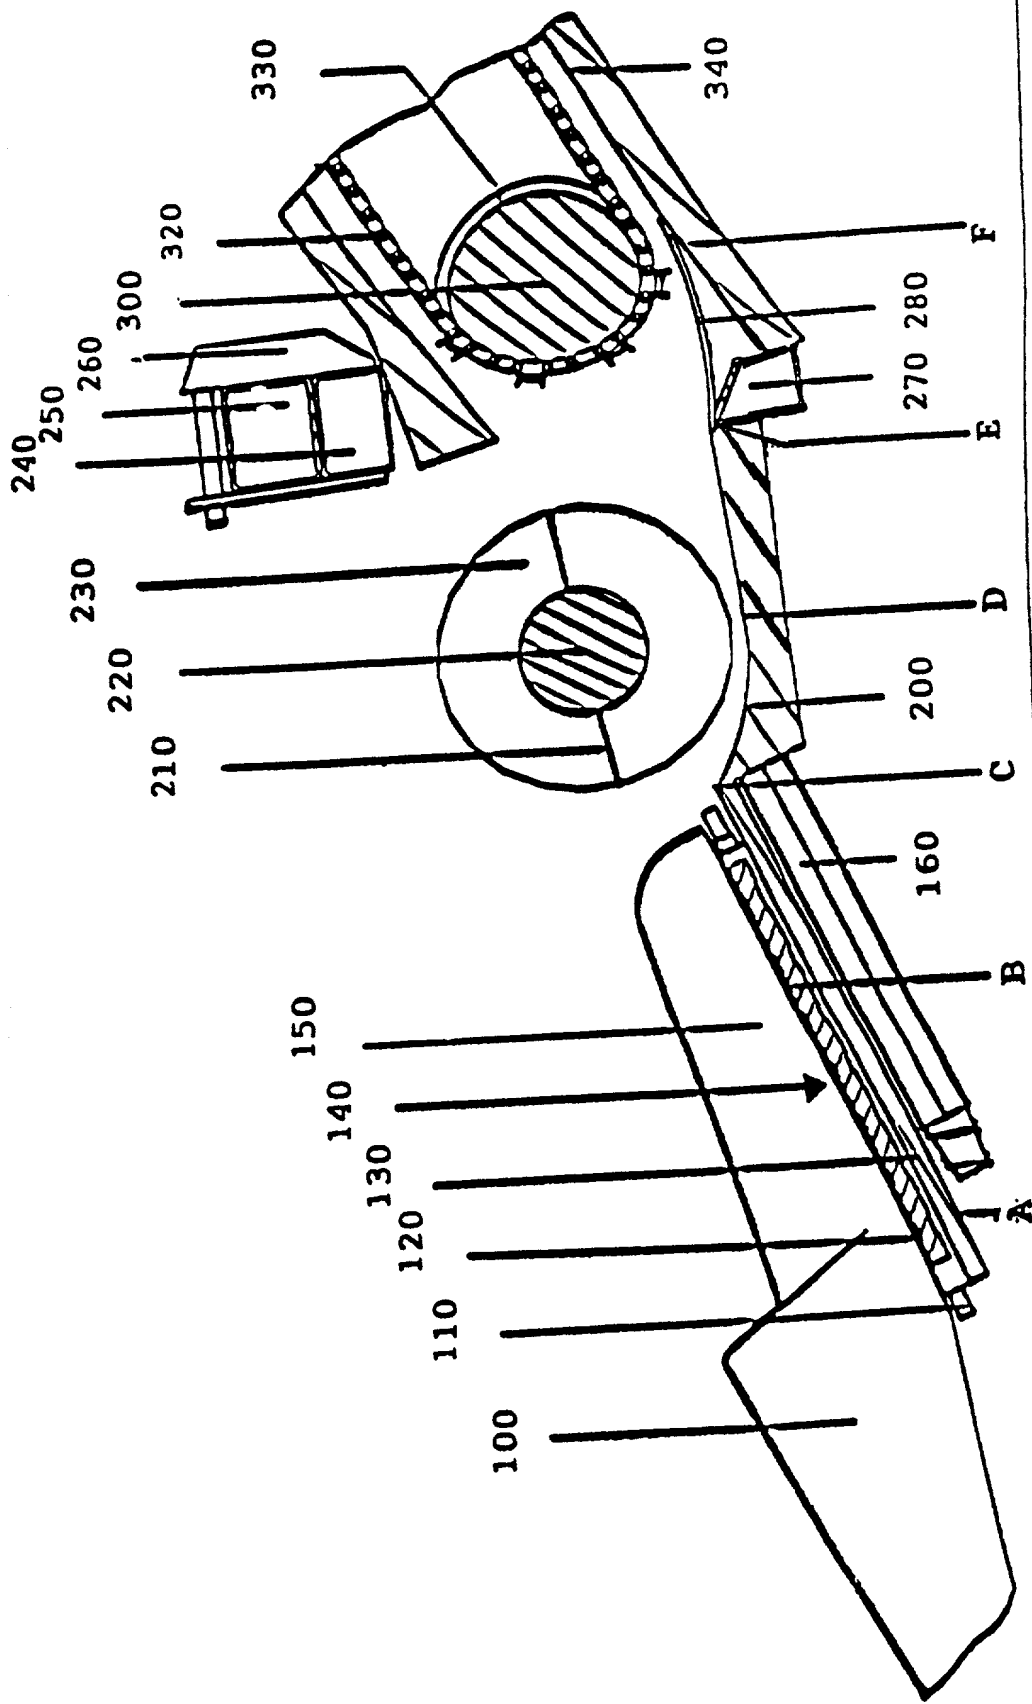

Ground Level
Fig. 4a

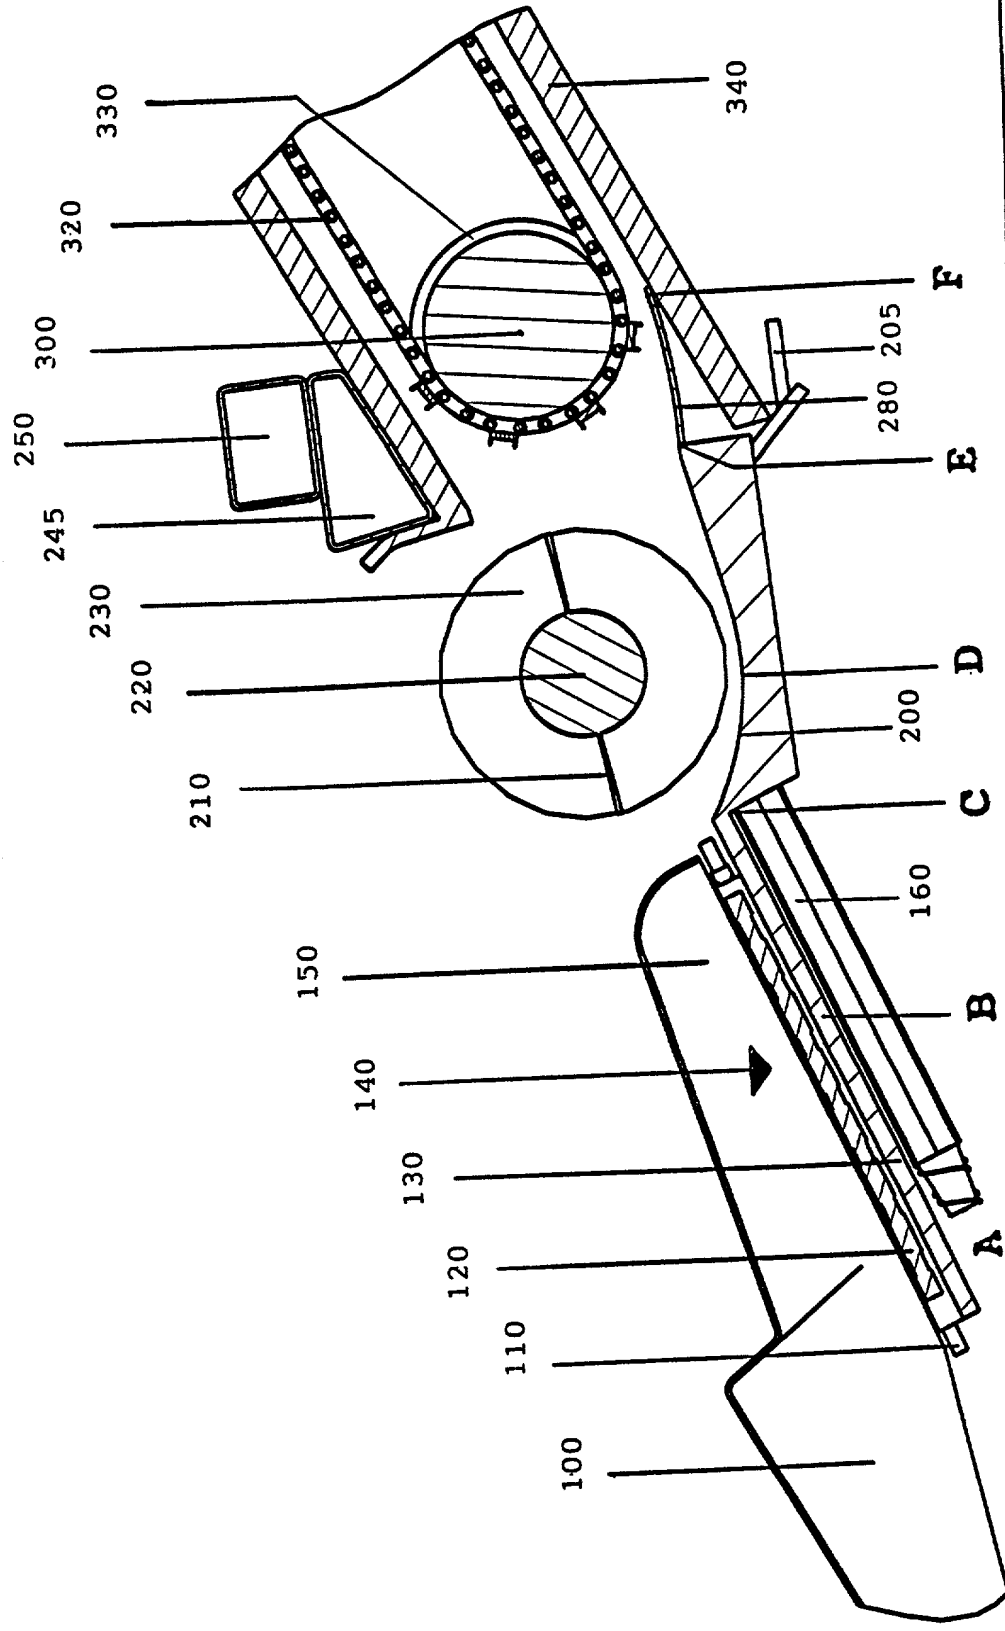


Fig. 5

Ground Level

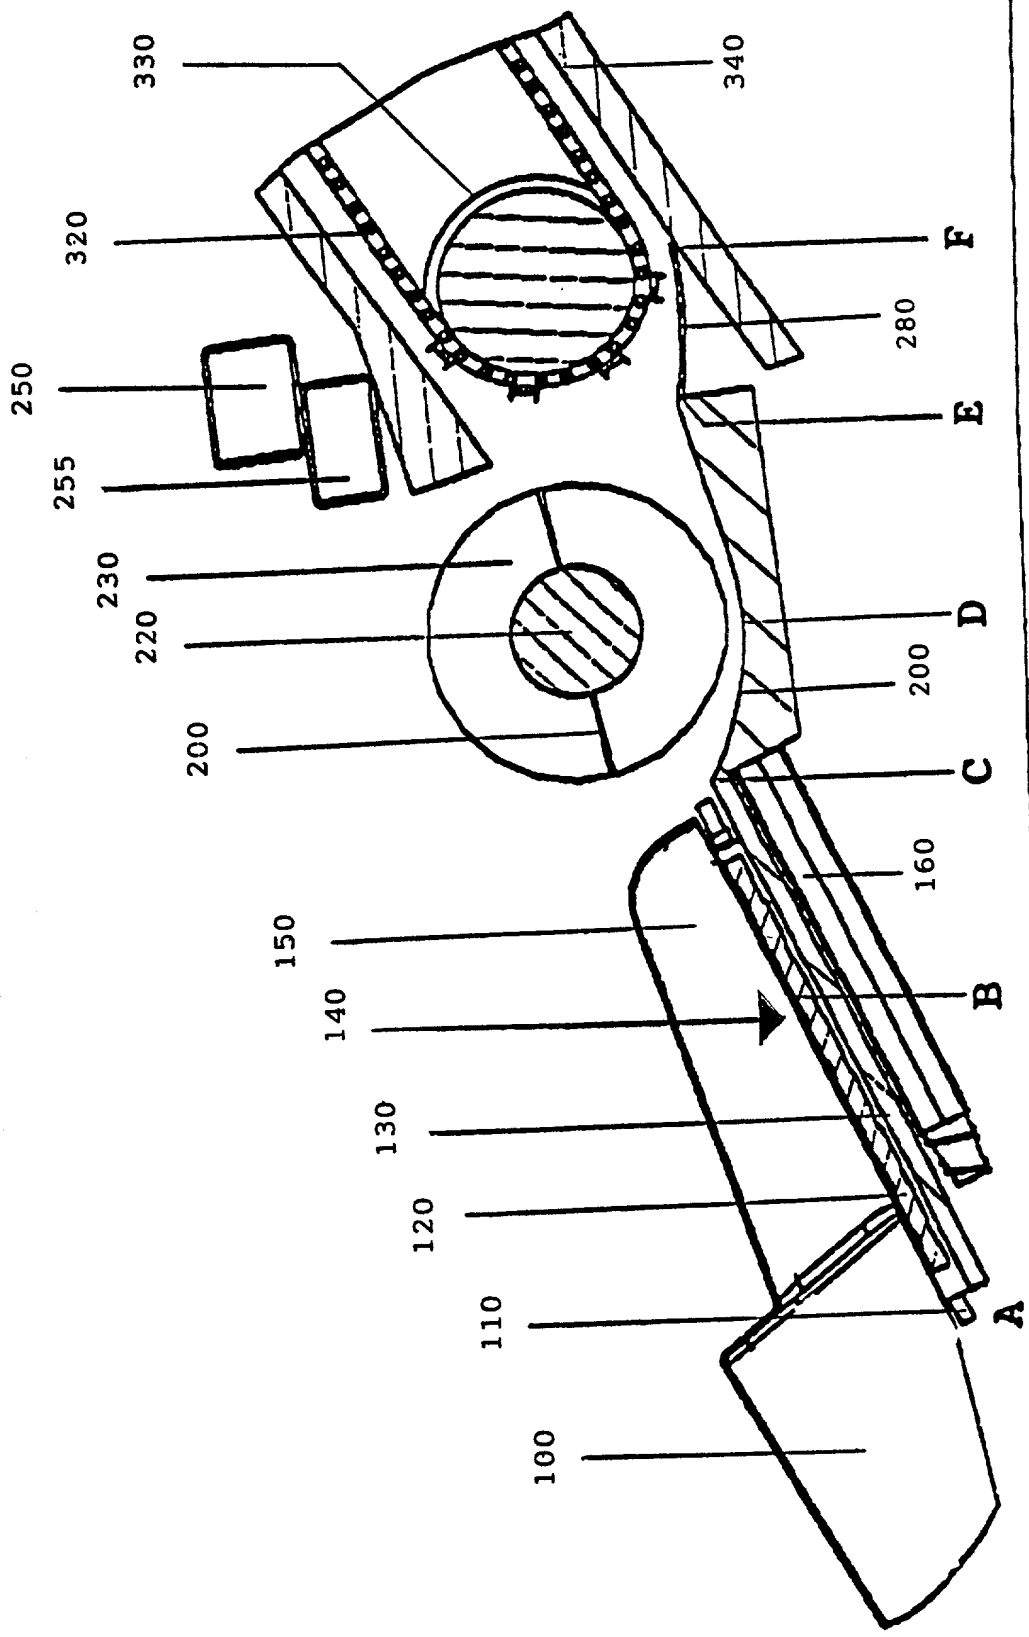


Fig. 6

Ground Level

FIG. 7 is a perspective view of the device in accordance with the present invention, showing the device in a closed position. The device includes a main body 100, a handle 150, a trigger 160, a release button 240, a lock 250, a latch 260, a hinge 275, and a bracket 272. The device is shown in a perspective view, with the handle 150 and trigger 160 extending from the main body 100. The release button 240 and lock 250 are located on the top surface of the main body 100. The latch 260 is located on the side of the main body 100. The hinge 275 and bracket 272 are located at the bottom of the main body 100.

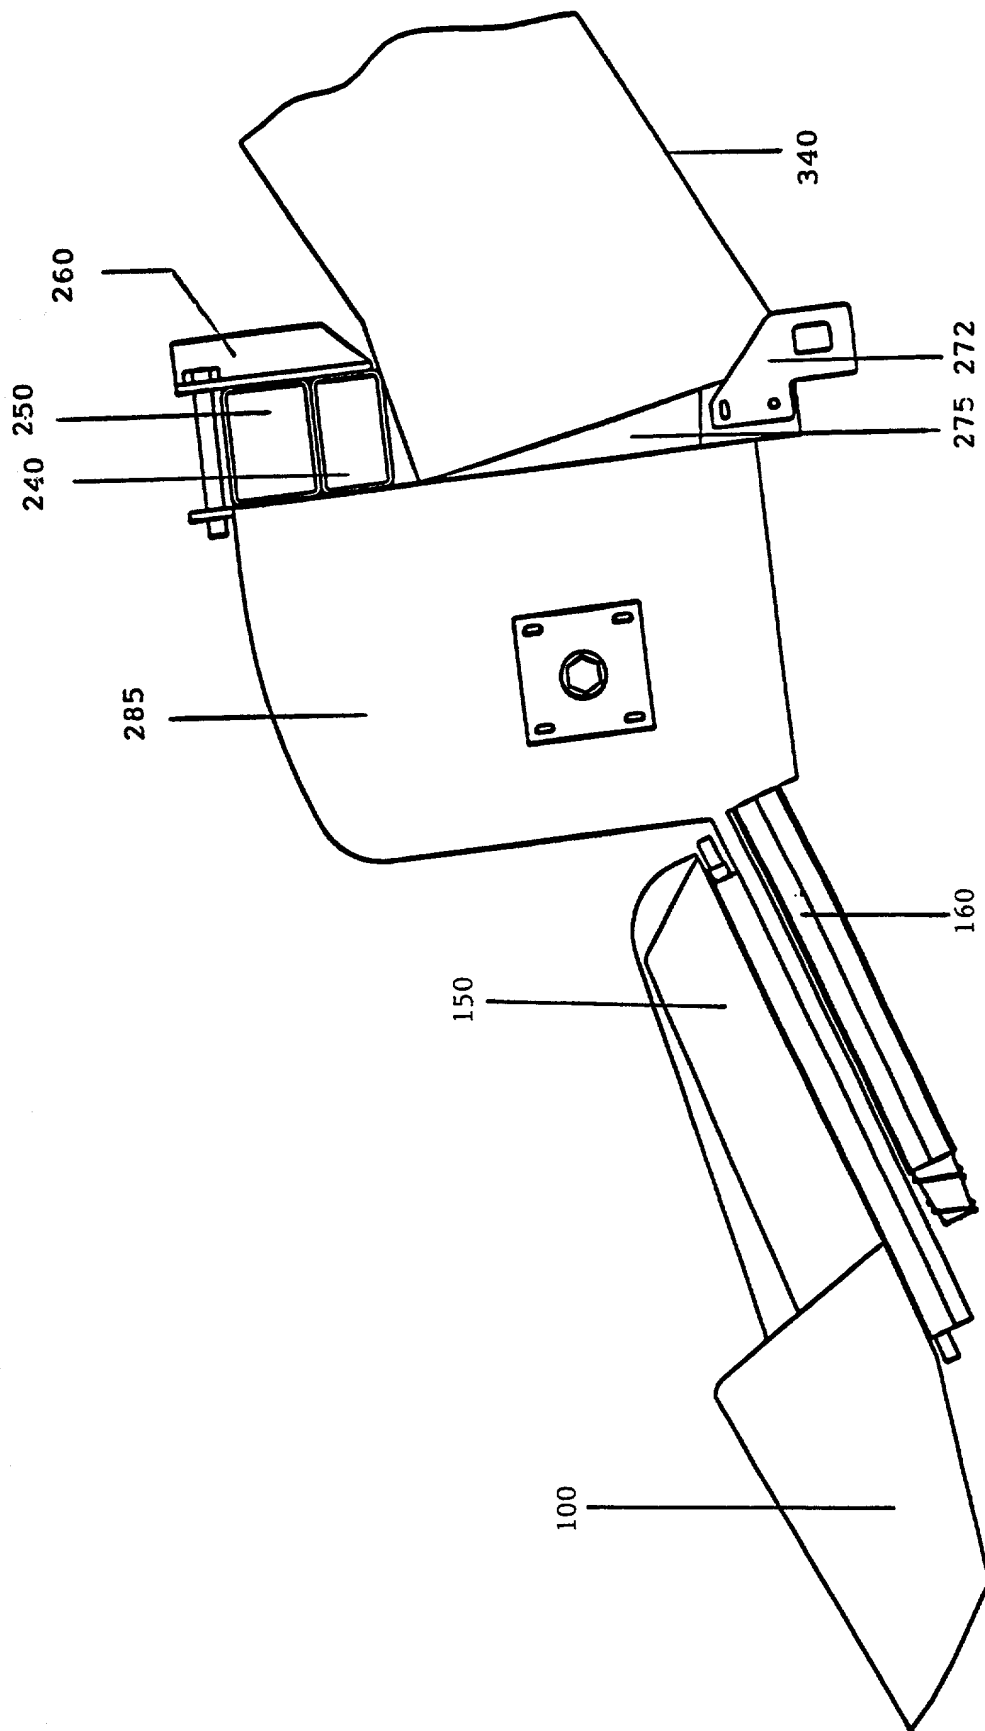


Fig. 7